

atrin **electronic**

Expertise, variety and quality



www.atrinelec.com

آترین الکترونیک

تخصص ، تنوع و کیفیت

02166766957 - 02166766927



info@atrinelec.com



تهران پاساژ امجد طبقه 1 واحد 16




@atrinelec



Current Transducer LA 55-P

$$I_{PN} = 50 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

I_{PN}	Primary nominal r.m.s. current	50	A
I_P	Primary current, measuring range	0 .. ± 70	A
R_M	Measuring resistance @	$T_A = 70^{\circ}\text{C}$ R_{Mmin} R_{Mmax}	$T_A = 85^{\circ}\text{C}$ R_{Mmin} R_{Mmax}
	with $\pm 12\text{ V}$	@ $\pm 50\text{ A}_{max}$	10 100 60 95 Ω
		@ $\pm 70\text{ A}_{max}$	10 50 60 ¹⁾ 60 ¹⁾ Ω
	with $\pm 15\text{ V}$	@ $\pm 50\text{ A}_{max}$	50 160 135 155 Ω
		@ $\pm 70\text{ A}_{max}$	50 90 135 ²⁾ 135 ²⁾ Ω
I_{SN}	Secondary nominal r.m.s. current	50	mA
K_N	Conversion ratio	1 : 1000	
V_C	Supply voltage ($\pm 5\%$)	$\pm 12 \dots 15$	V
I_C	Current consumption	10 (@ $\pm 15\text{ V}$) + I_S	mA
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5	kV

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V}$ ($\pm 5 \%$)	± 0.65	%
		@ $\pm 12 \dots 15 \text{ V}$ ($\pm 5 \%$)	± 0.90	%
e_L	Linearity		< 0.15	%
I_O	Offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ	Max	
I_{OM}	Residual current ³⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$		± 0.2	mA
I_{OT}	Thermal drift of I_O		± 0.3	mA
	0°C .. + 70°C	± 0.1	± 0.5	mA
	- 25°C .. + 85°C	± 0.1	± 0.6	mA
t_{ra}	Reaction time @ 10 % of I_{Pmax}	< 500	ns	
t_r	Response time @ 90 % of I_{Pmax}	< 1	μs	
di/dt	di/dt accurately followed	> 200	A/ μs	
f	Frequency bandwidth (- 1 dB)	DC .. 200	kHz	

General data

T_A	Ambient operating temperature	- 25 .. + 85	°C
T_S	Ambient storage temperature	- 40 .. + 90	°C
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	80 Ω
		$T_A = 85^\circ\text{C}$	85 Ω
m	Mass	18	g
	Standards ⁴⁾	EN 50178	

- Notes : ¹⁾ Measuring range limited to $\pm 60 \text{ A}_{max}$
²⁾ Measuring range limited to $\pm 55 \text{ A}_{max}$
³⁾ Result of the coercive field of the magnetic circuit
⁴⁾ A list of corresponding tests is available

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.


Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Dimensions LA 55-P (in mm. 1 mm = 0.0394 inch)

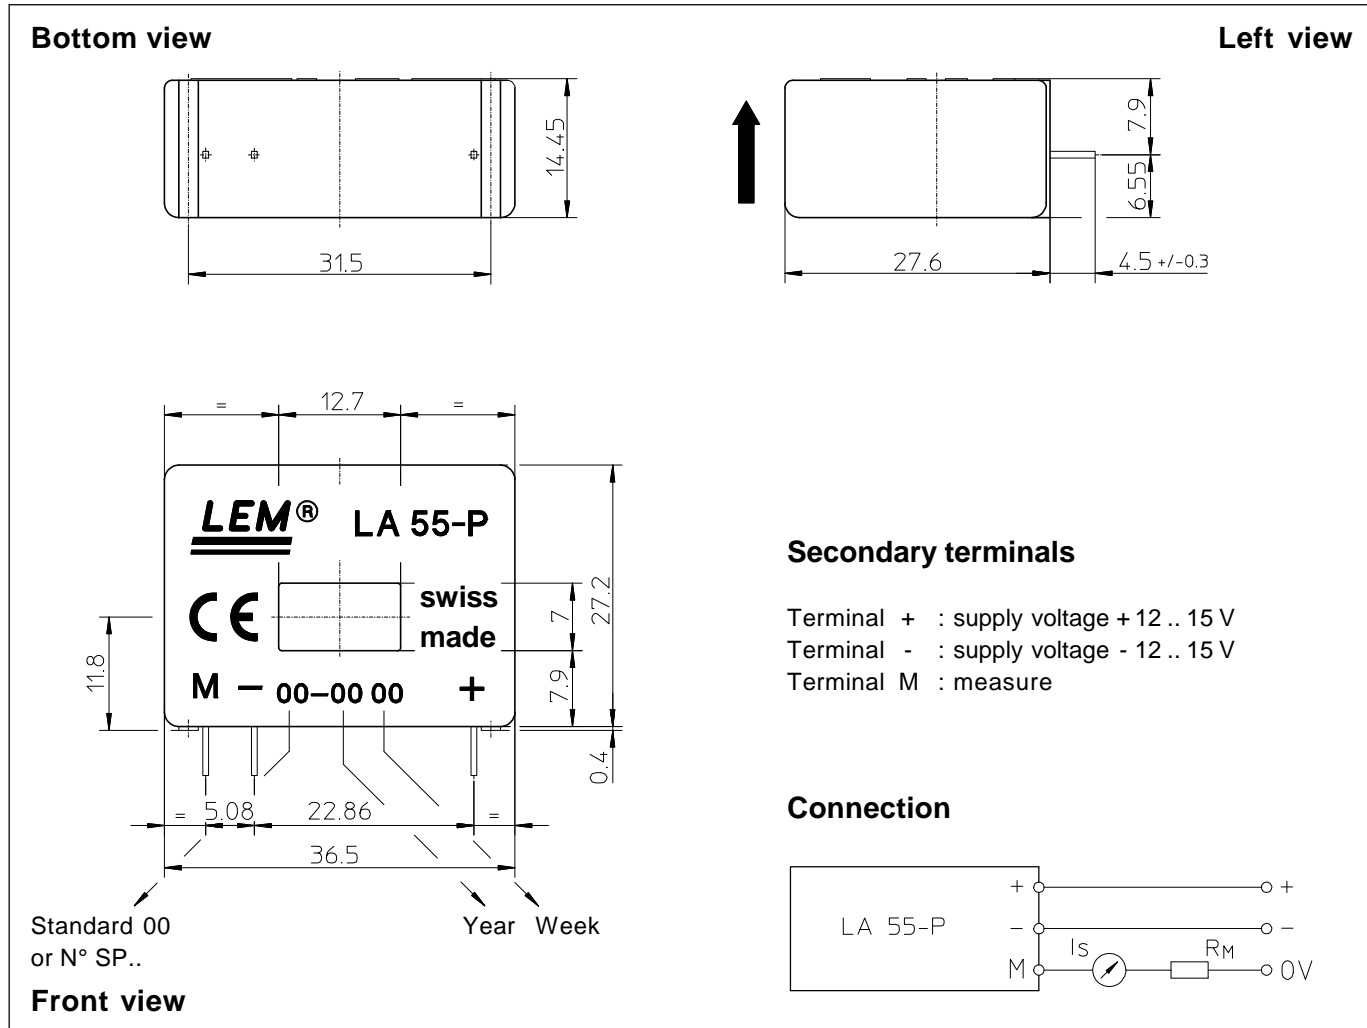

Mechanical characteristics

- General tolerance ± 0.2 mm
- Primary through-hole 12.7 x 7 mm
- Fastening & connection of secondary 3 pins
- Recommended PCB hole 0.63 x 0.56mm
- 0.9 mm

Remarks

- I_S is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.