

atrin **electronic**

Expertise, variety and quality



www.atrinelec.com

آترین الکترونیک

تخصص ، تنوع و کیفیت

02166766957 - 02166766927



info@atrinelec.com



تهران پاساژ امجد طبقه 1 واحد 16



@atrinelec



规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户: _____

PRODUCT 产 品: Frequency Synthesizer

MODEL NO 型 号: HD M9180

PREPARED 编 制: Duchuangang CHECKED 审 核: Houshihong

APPROVED 批 准: CHARLES D A T E 日 期: 2007-06-15

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录

History Record

[illegible]

1.Features

4.75 to 5.25 Power supply

2.Applications


Base station

3. ELECTRICAL SPECIFICATION

Electrical characteristics

parameter	min	typ	max	units	Remarks
Frequency range	2250		2310	MHz	
Step size		200		KHz	
Settling time		0.4	10	msec	within +/-50Hz
Output power					
	1	2	3	dBm	
	1	2	3	dBm	@+25C
Output phase noise					
1KHz		-73	-70	dBc/Hz	
10KHz		-90	-85	dBc/Hz	
100KHz		-118	-108	dBc/Hz	
200KHz		-120	-118	dBc/Hz	
1MHZ		-138	-135	dBc/Hz	
Power supply					
	4.75	5	5.25	Volts	VCO
	4.75	5	5.25	Volts	PLL
Supply current					
		30	40	mA	VCO
		10	15	mA	PLL
Spurious product					
200KHz		-75	-70	dBc	
400KHz		-80	-75	dBc	
600KHz		-90	-85	dBc	
Reference feedthrough		-100	-97	dBc	
Harmonic suppression					
2nd harmonic		-25	-20	dBc	
Ref osc signal					
frequency	10		40	MHz	
amplitude	3		5	Vp-p	
Phase noise-1KHz		-145		dBc/Hz	
Input impedance		100		K Ω	
Output impedance		50		Ω	

4. DIMENSION

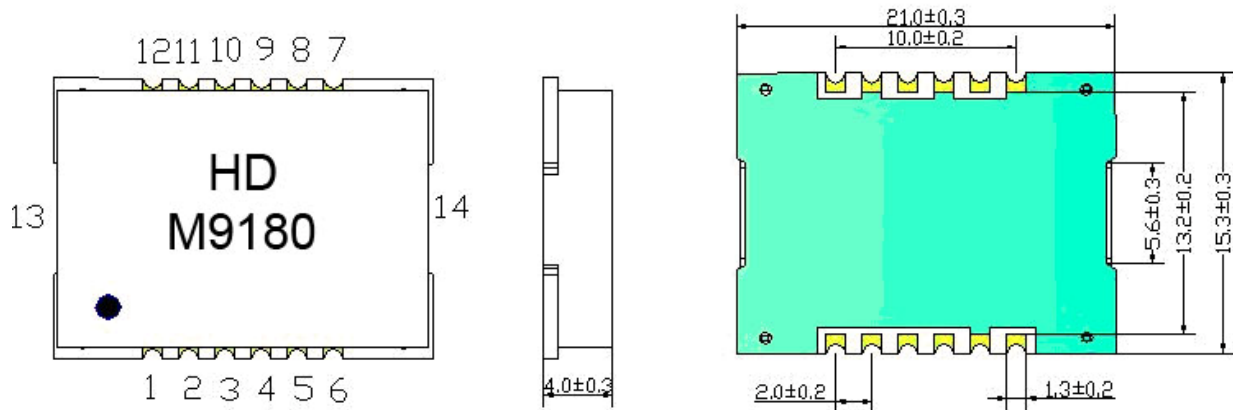

Pin NO.	Function	Pin NO.	Function
1	V _{pll}	8	GND
2	GND	9	MUXOUT
3	REFin	10	CLK
4	GND	12	DATA
5	V _{vco}	12	LE
6	GND	13	GND
7	RFout	14	GND

注意事项:

- To Good Grounding
- Good Power Filter
- The maximum Welding Temperature 230 °C, 10S