

atrin **electronic**

Expertise, variety and quality



www.atrinelec.com

آترین الکترونیک

تخصص، تنوع و کیفیت

۰۲۱۶۶۷۰۳۶۵۲



تهران، پاساژ امجد، طبقه اول، واحد ۱۶




Info@Atrinelec.com



@ATRINELEC



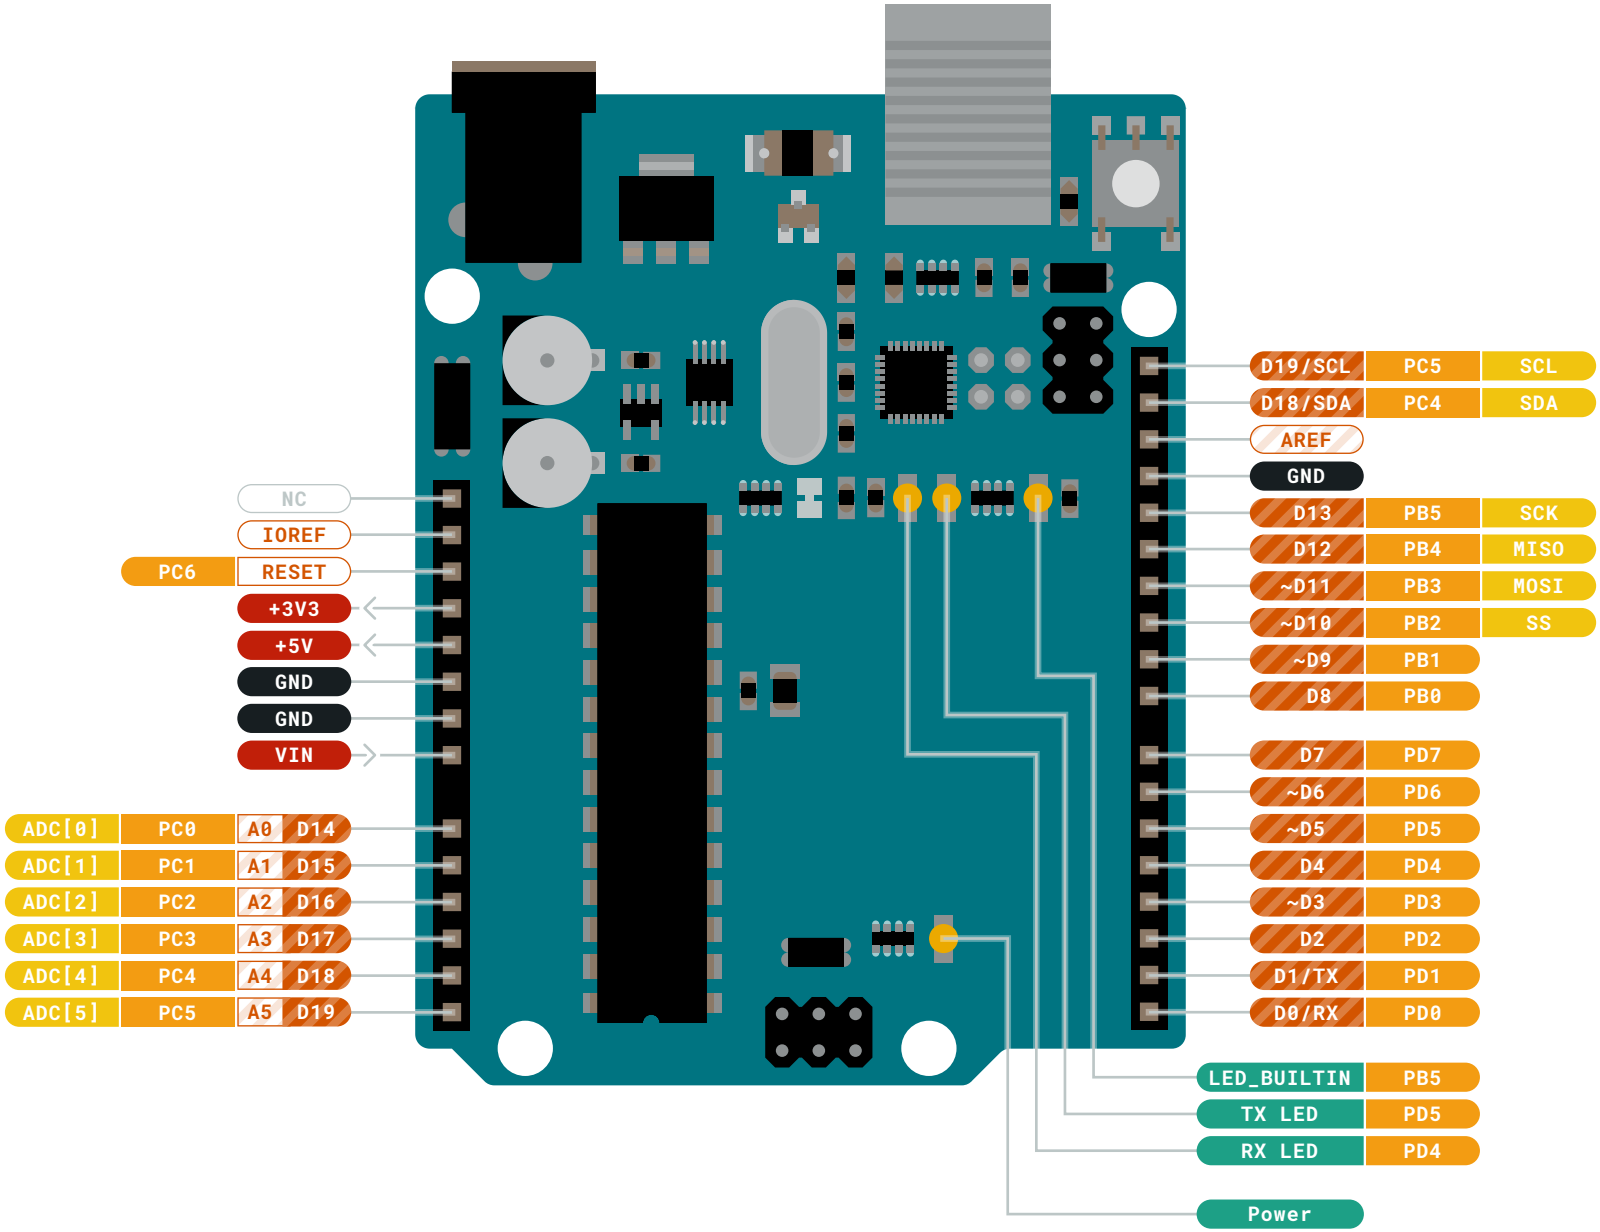


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.



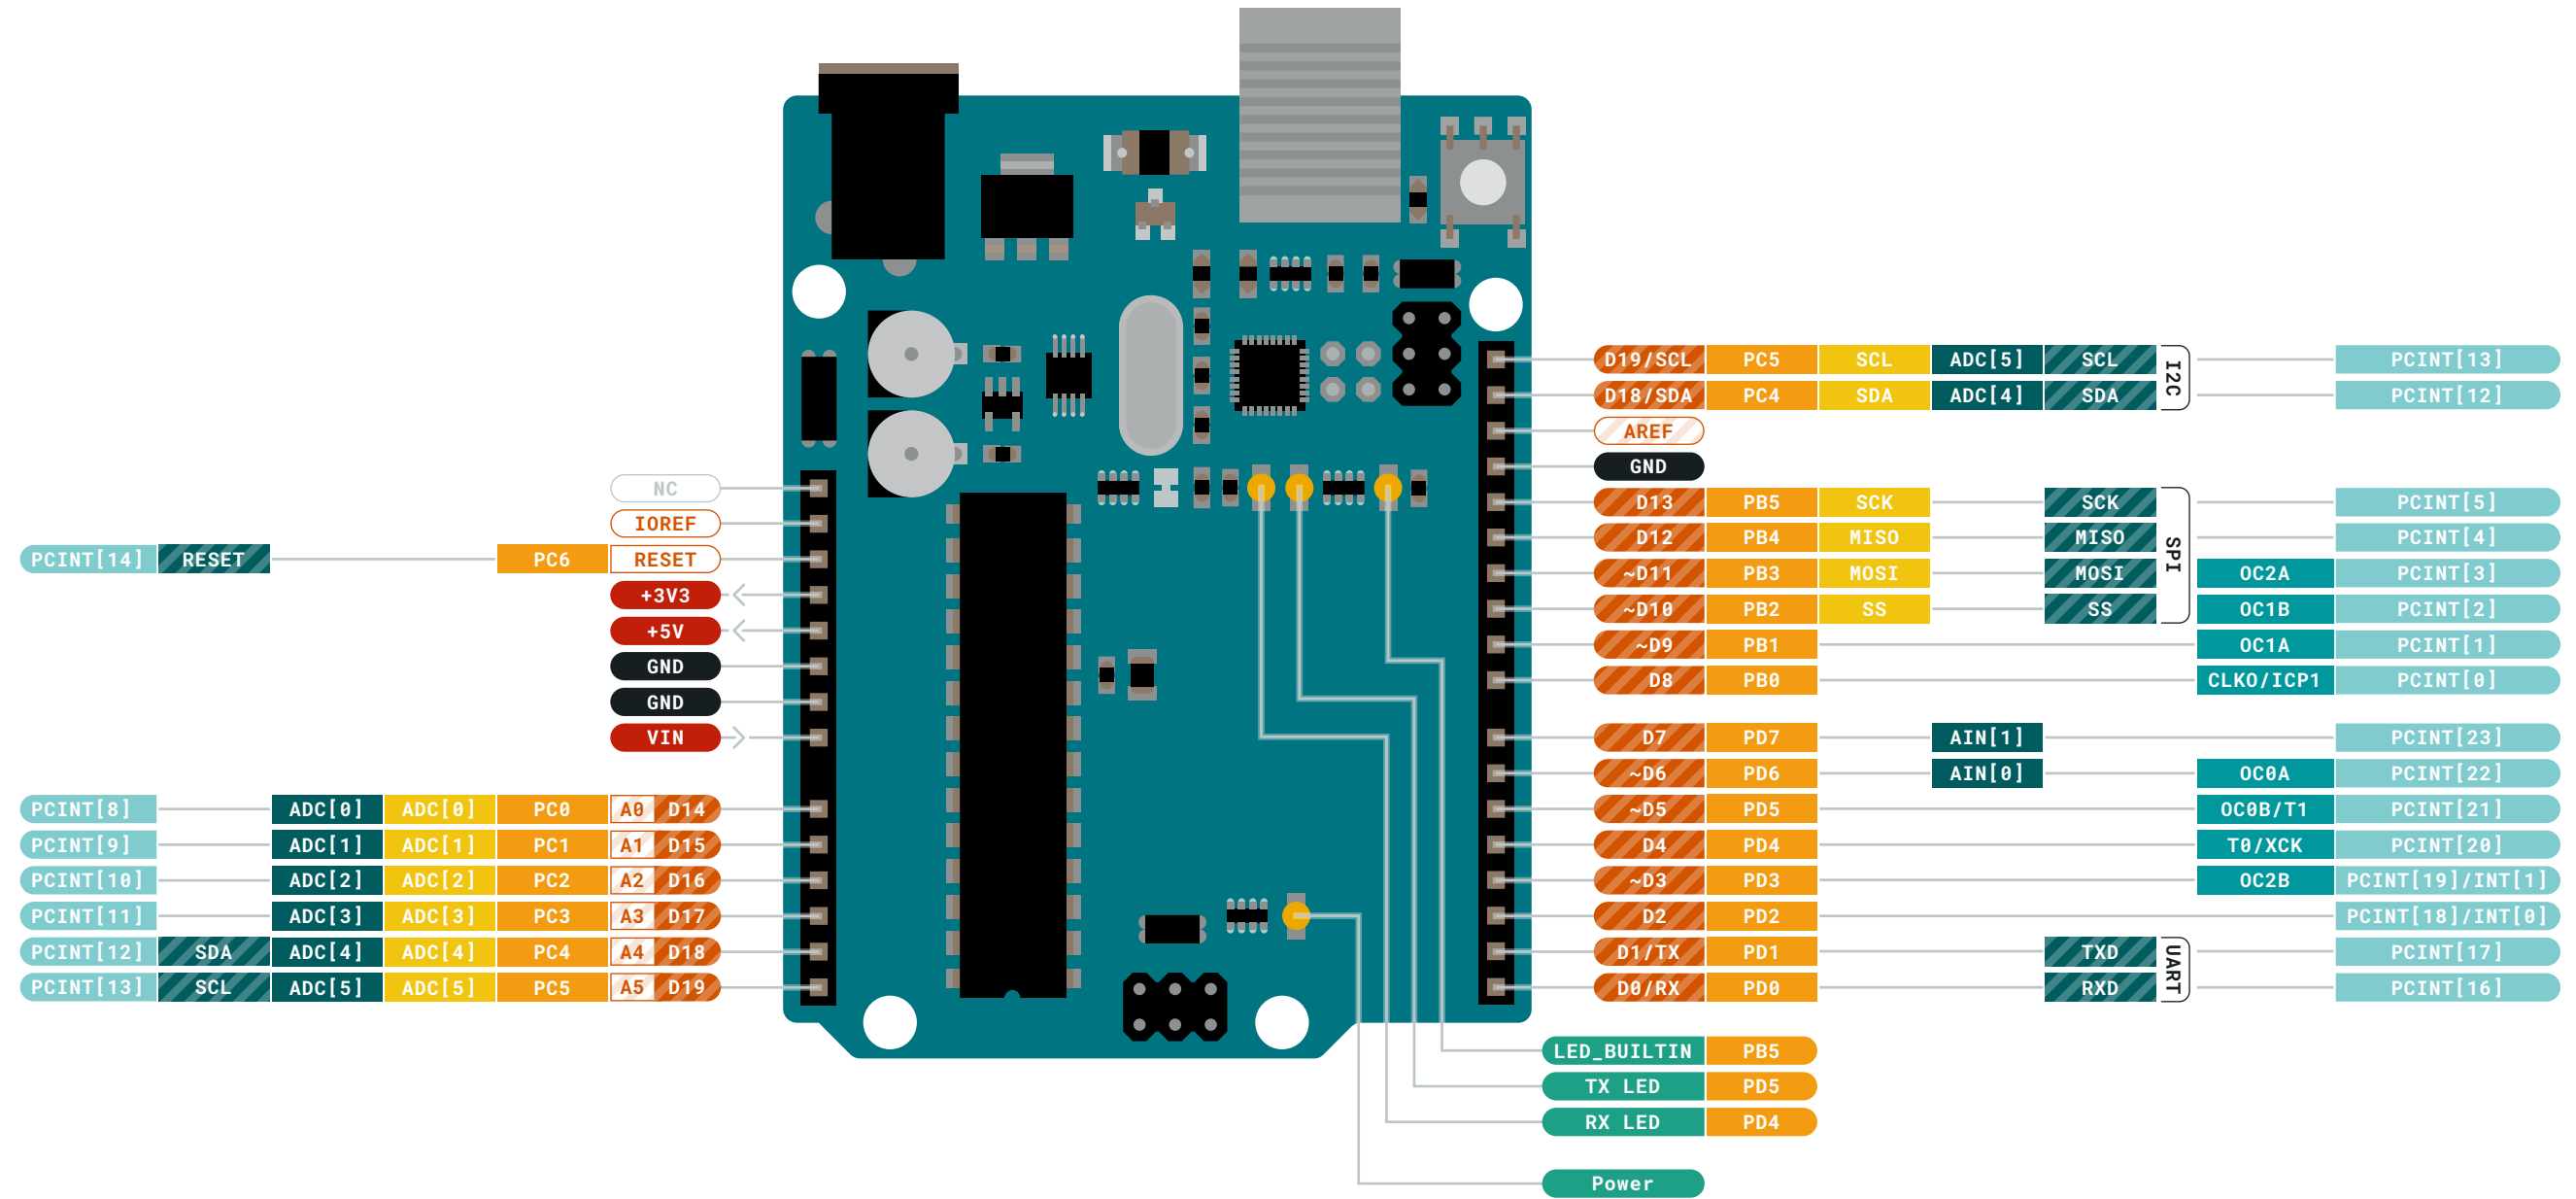

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom


MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

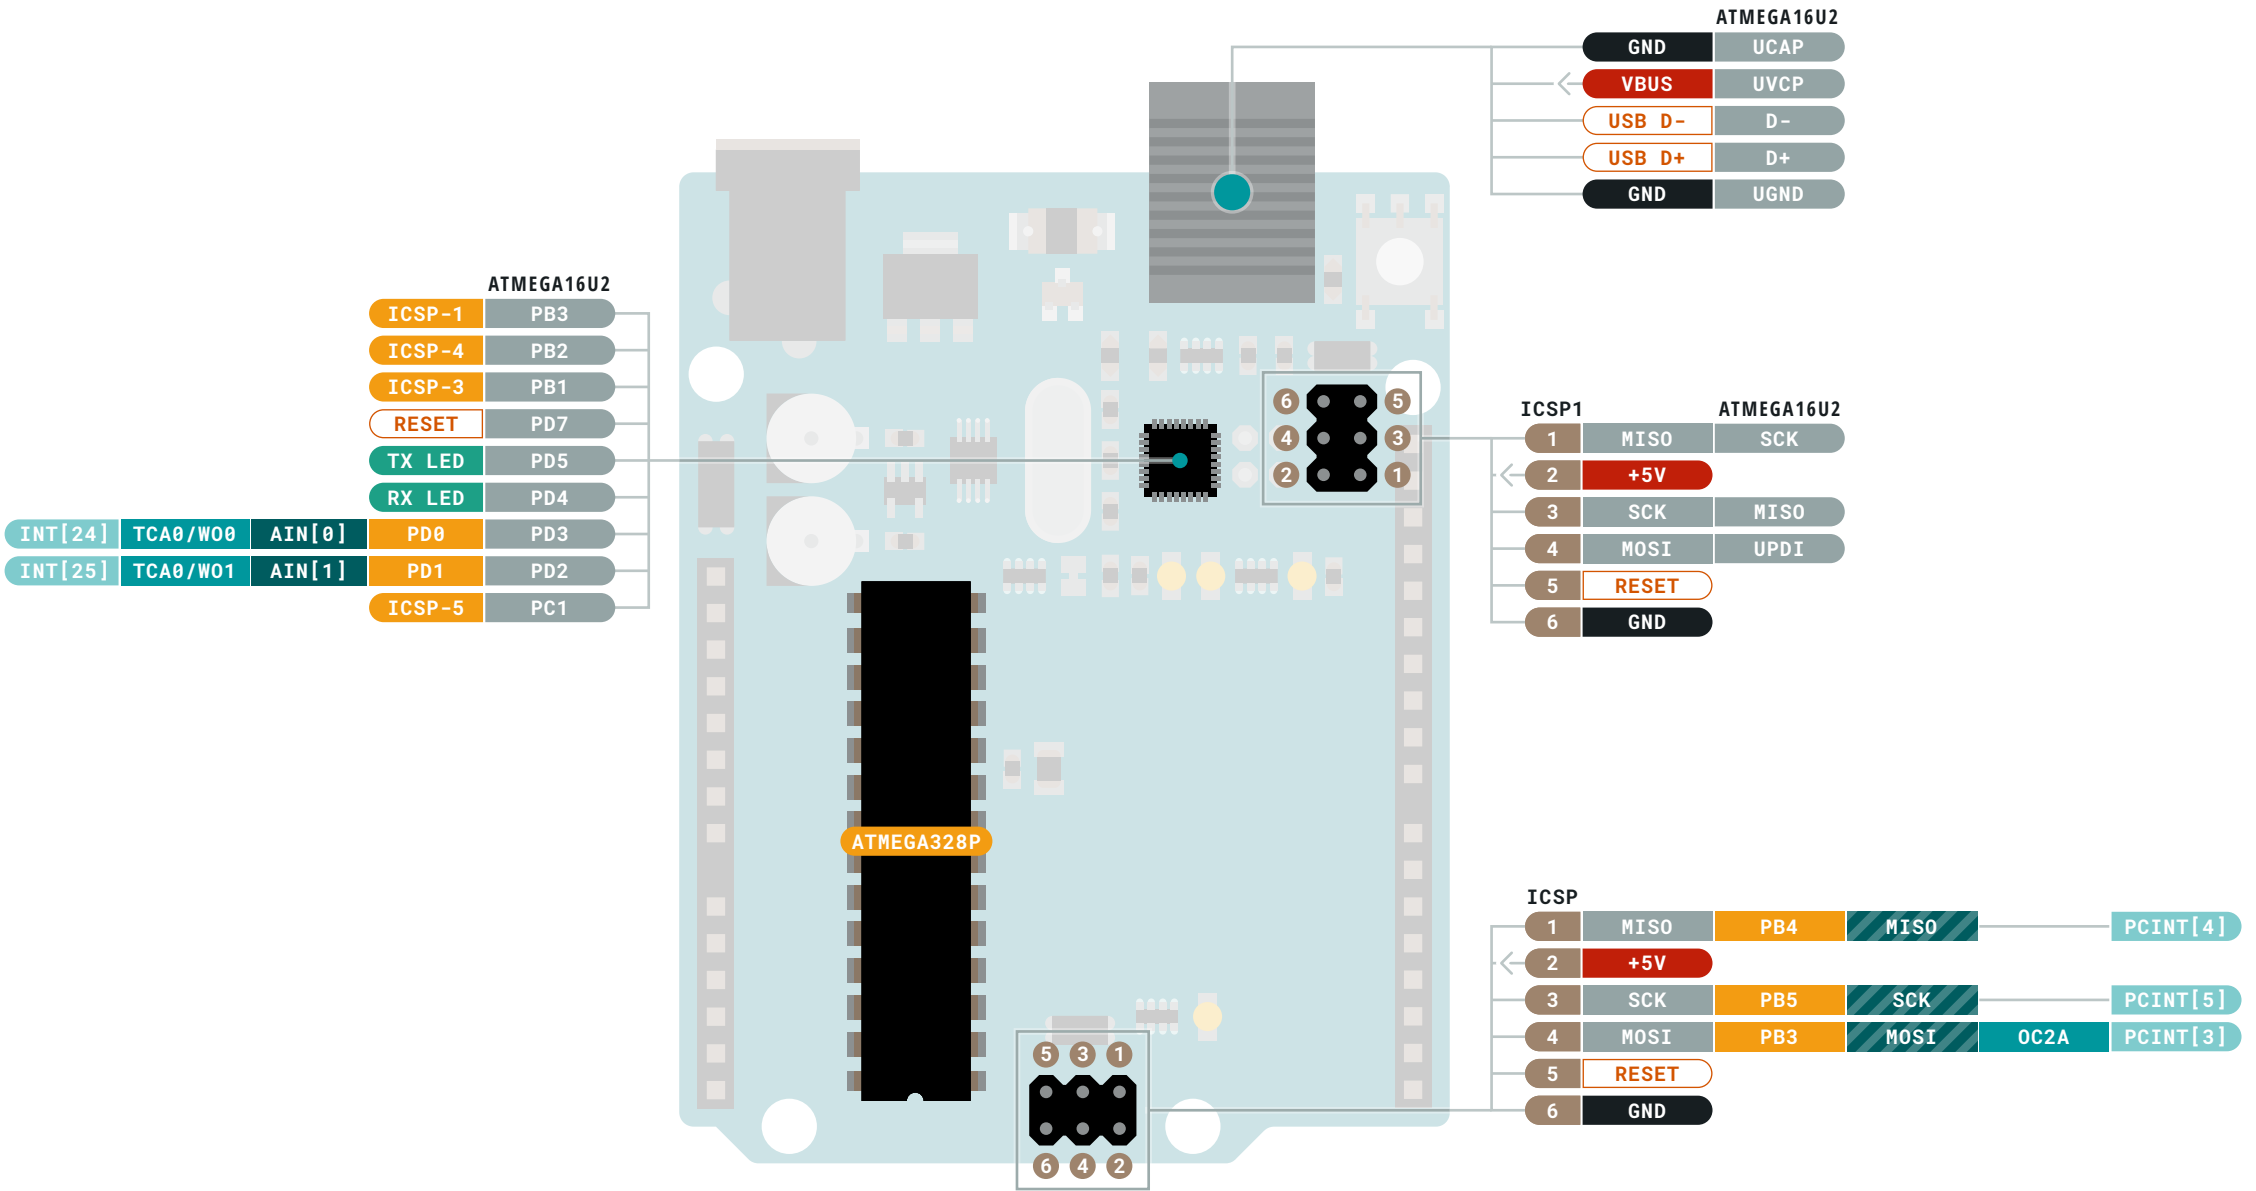

- | | | |
|---|--|---|
|  Ground |  Digital Pin |  Analog |
|  Power |  Analog Pin |  Communication |
|  LED |  Other Pin |  Timer |
|  Internal Pin |  Microcontroller's Port |  Interrupt |
|  SWD Pin |  Default |  Sercom |


 **MAXIMUM** current per I/O pin is 20mA

 **MAXIMUM** current per +3.3V pin is 50mA

VIN 6-20 V input to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

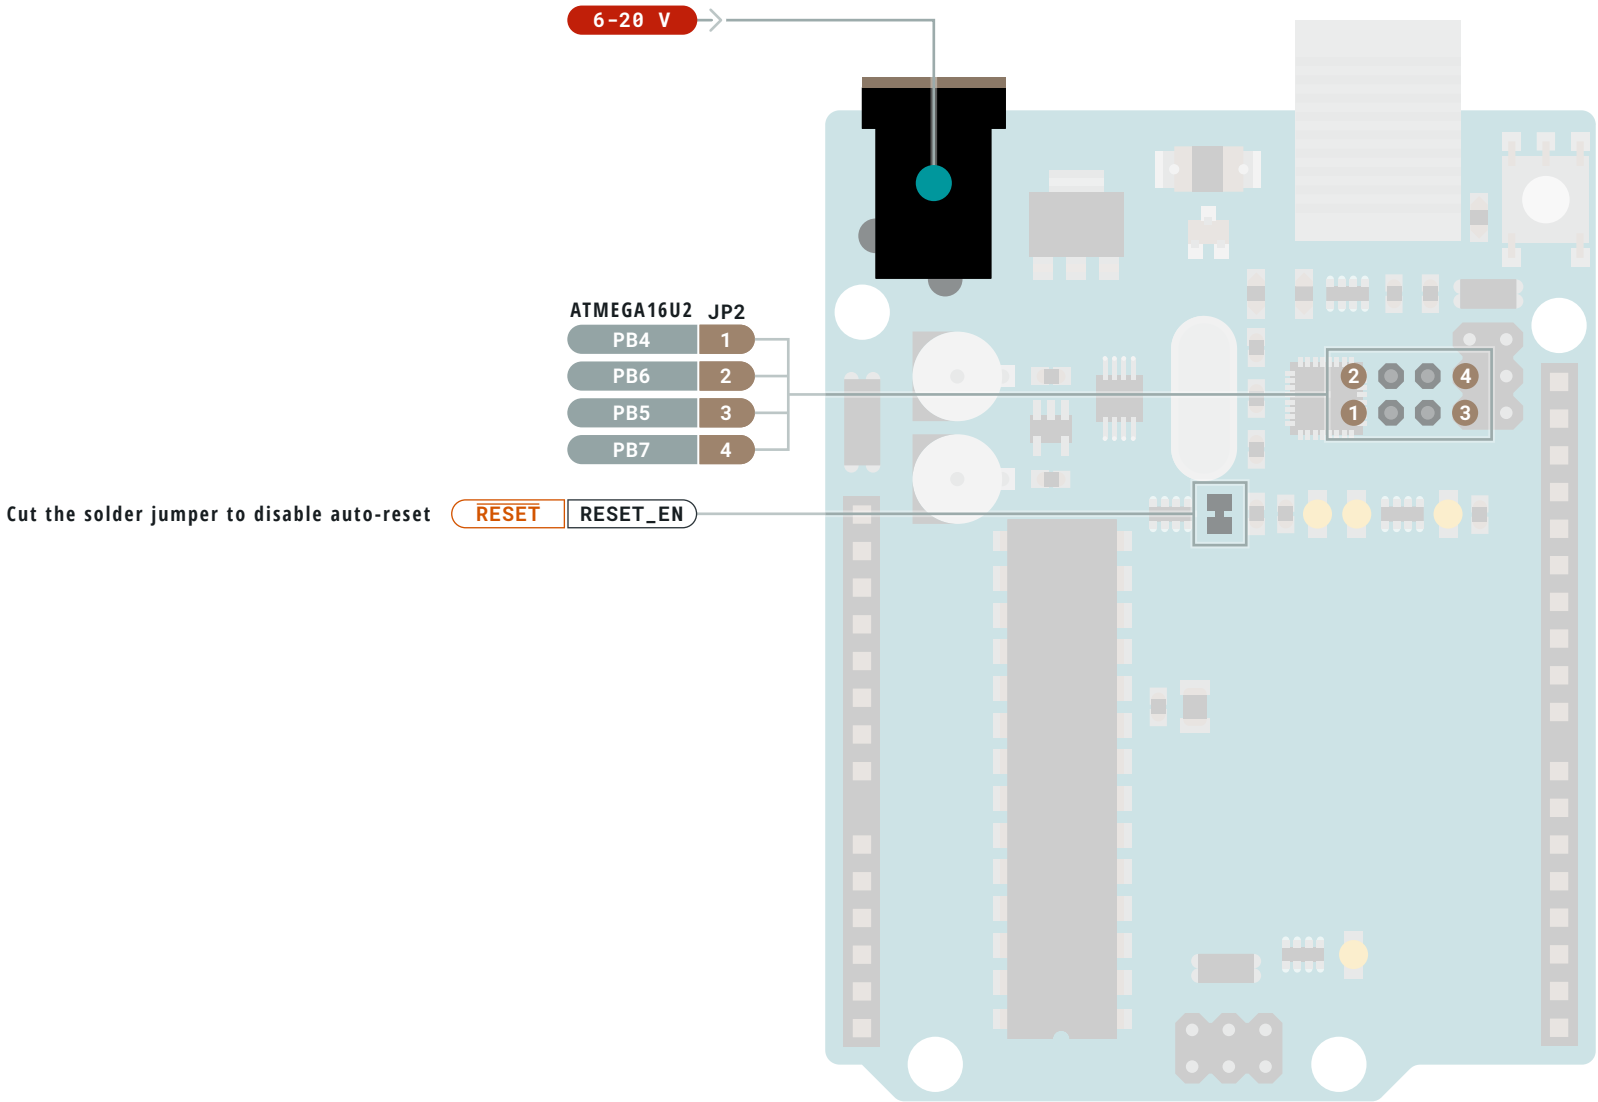

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default

SJ Pin
Making a short circuit using the solder jumper allows only the function in the SJ Pin cells.

MAXIMUM current per I/O pin is 20mA
MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.

