

atrin **electronic**

Expertise, variety and quality



www.atrinelec.com

آترین الکترونیک

تخصص، تنوع و کیفیت

02166766957 - 02166766927



info@atrinelec.com



تهران پاساژ امجد طبقه 1 واحد 16



@atrinelec





SEMITRANS® 2

IGBT4 Modules

SKM 150GB12T4

Target Data

Features

- IGBT4 = 4. Generation IGBT
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_{CNOM}$
- Soft switching 4 Generation CAL diode (CAL4)

Typical Applications

- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

Remarks


- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm. $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j \leq 150^\circ$



GB

Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$, unless otherwise specified		
Symbol	Conditions	Values	Units	
IGBT				
V_{CES}	$T_j = 25^\circ\text{C}$	1200	V	
I_C	$T_j = 175^\circ\text{C}$	$T_{case} = 25^\circ\text{C}$	230	A
		$T_{case} = 80^\circ\text{C}$	180	A
I_{CRM}	$I_{CRM} = 3 \times I_{CNOM}$	450	A	
V_{GES}		± 20	V	
t_{psc}	$V_{CC} = 600\text{ V}; V_{GE} \leq 15\text{ V}; T_j = 150^\circ\text{C}$ $V_{CES} < 1200\text{ V}$	10	μs	
Inverse Diode				
I_F	$T_j = 175^\circ\text{C}$	$T_{case} = 25^\circ\text{C}$	190	A
		$T_{case} = 80^\circ\text{C}$	140	A
I_{FRM}	$I_{FRM} = 3 \times I_{FNOM}$	450	A	
I_{FSM}	$t_p = 10\text{ ms}; \text{sin.}$	$T_j = 175^\circ\text{C}$	900	A
Module				
$I_{t(RMS)}$		200	A	
T_{vj}		$-40 \dots +175$	$^\circ\text{C}$	
T_{stg}		$-40 \dots +125$	$^\circ\text{C}$	
V_{isol}	AC, 1 min.	4000	V	

Characteristics		$T_c = 25^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 6\text{ mA}$	5	5,8	6,5	V
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	$T_j = 25^\circ\text{C}$			mA
		$T_j = 150^\circ\text{C}$			
V_{CE0}		$T_j = 25^\circ\text{C}$	0,8	0,9	V
		$T_j = 150^\circ\text{C}$	0,7	0,8	V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}$	6,7	7,3	$\text{m}\Omega$
		$T_j = 150^\circ\text{C}$	10	10,7	$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 150\text{ A}, V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}_{chiplev.}$	1,8	2	V
		$T_j = 150^\circ\text{C}_{chiplev.}$	2,2	2,4	V
C_{res}	$V_{CE} = 25, V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	9,3		nF
C_{oes}			0,58		nF
C_{res}			0,51		nF
Q_G	$V_{GE} = -8\text{ V} / +15\text{ V}$		850		nC
R_{Gint}	$T_j = 25^\circ\text{C}$		5		Ω
$t_{d(on)}$	$R_{Gon} = \Omega$	$V_{CC} = 600\text{ V}$ $I_{Cnom} = 150\text{ A}$ $T_j = 150^\circ\text{C}$ $V_{GE} \leq -8\text{ V}$	14,8		ns
t_r					ns
E_{on}	$R_{Goff} = \Omega$		14,8		mJ
$t_{d(off)}$					ns
t_f			14,8		ns
E_{off}					mJ
$R_{th(j-c)}$	per IGBT			0,19	K/W

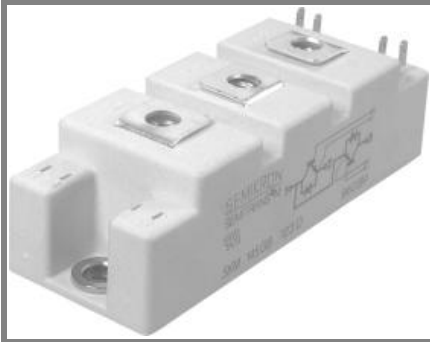

SEMITRANS® 2

IGBT4 Modules

SKM 150GB12T4

Target Data

Features


- IGBT4 = 4. Generation IGBT
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_{CNOM}$
- Soft switching 4 Generation CAL diode (CAL4)

Typical Applications

- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm. $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j \leq 150^\circ$




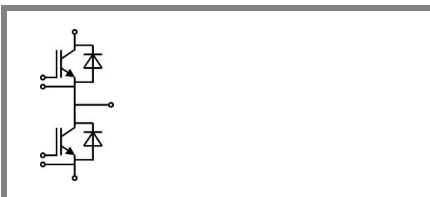




GB

Characteristics			min.	typ.	max.	Units
Symbol	Conditions					
Inverse Diode						
$V_F = V_{EC}$	$I_{Fnom} = 150 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25^\circ\text{C}_{chiplev.}$		2,15	2,45	V
		$T_j = 150^\circ\text{C}_{chiplev.}$		2,05	2,4	V
V_{F0}		$T_j = 25^\circ\text{C}$		1,3	1,5	V
		$T_j = 150^\circ\text{C}$		0,9	1,1	V
r_F		$T_j = 25^\circ\text{C}$		5,67	6,33	mΩ
		$T_j = 150^\circ\text{C}$		7,67	8,67	mΩ
I_{RRM}	$I_{Fnom} = 150 \text{ A}$	$T_j = 150^\circ\text{C}$				A
Q_{rr}						μC
E_{rr}				11,3		mJ
$R_{th(j-c)}$	per diode				0,31	K/W
Freewheeling Diode						
$V_F = V_{EC}$	$I_{Fnom} = \text{A}; V_{GE} = \text{V}$	$T_j = ^\circ\text{C}_{chiplev.}$				V
V_{F0}		$T_j = ^\circ\text{C}$				V
r_F		$T_j = ^\circ\text{C}$				V
I_{RRM}	$I_{Fnom} = \text{A}$	$T_j = ^\circ\text{C}$				A
Q_{rr}						μC
E_{rr}						mJ
	per diode					K/W
Module						
L_{CE}				20	30	nH
$R_{CC'+EE'}$	res., terminal-chip	$T_{case} = 25^\circ\text{C}$			0,75	mΩ
		$T_{case} = 125^\circ\text{C}$			1	mΩ
$R_{th(c-s)}$	per module				0,05	K/W
M_s	to heat sink M6			3	5	Nm
M_t	to terminals M5			2,5	5	Nm
w					160	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

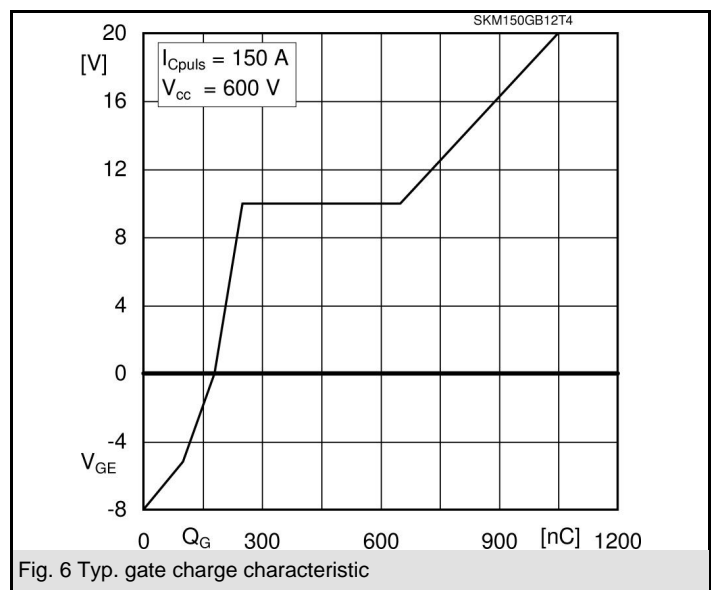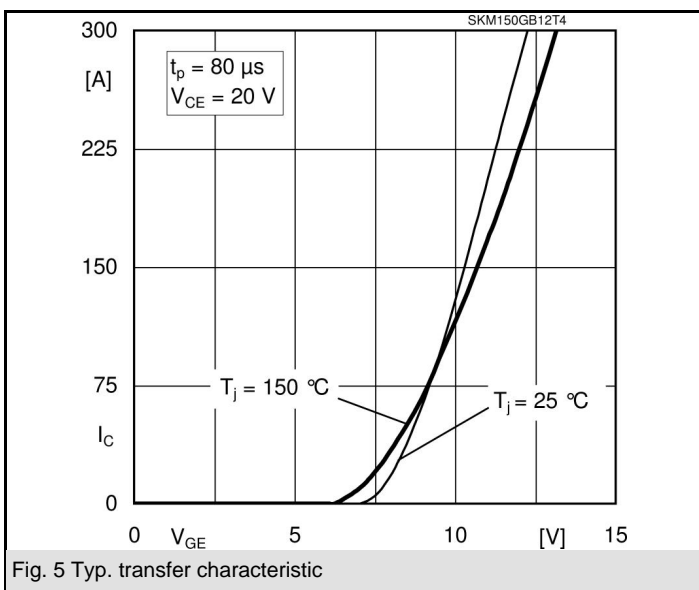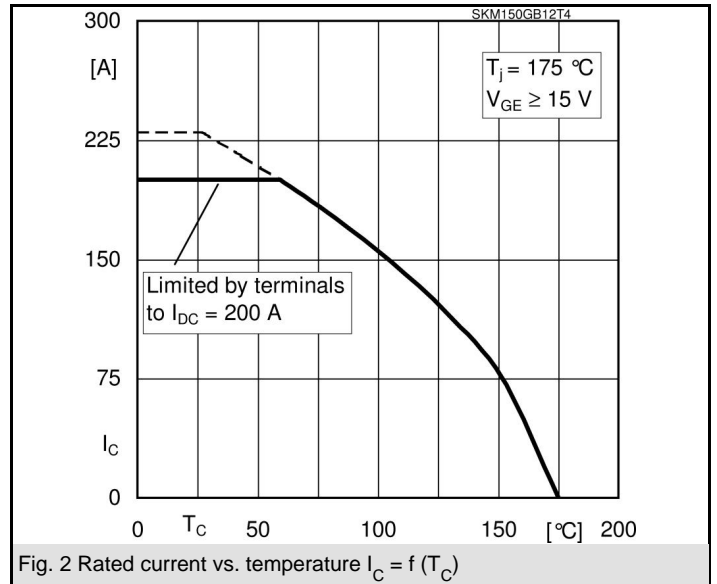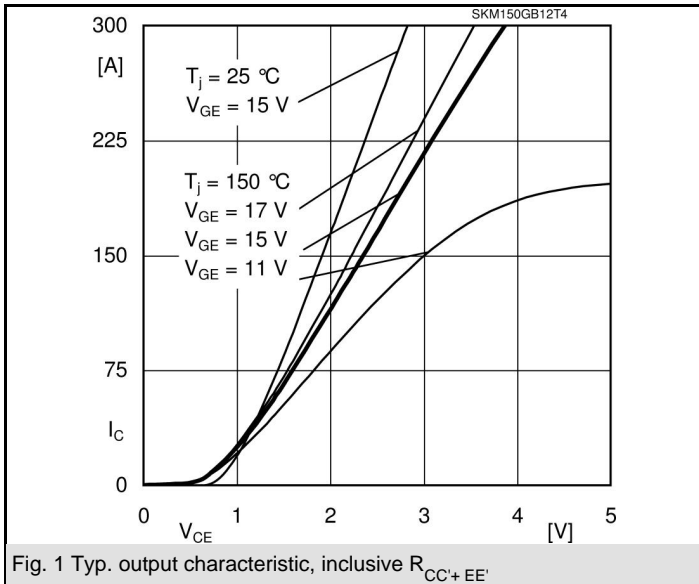

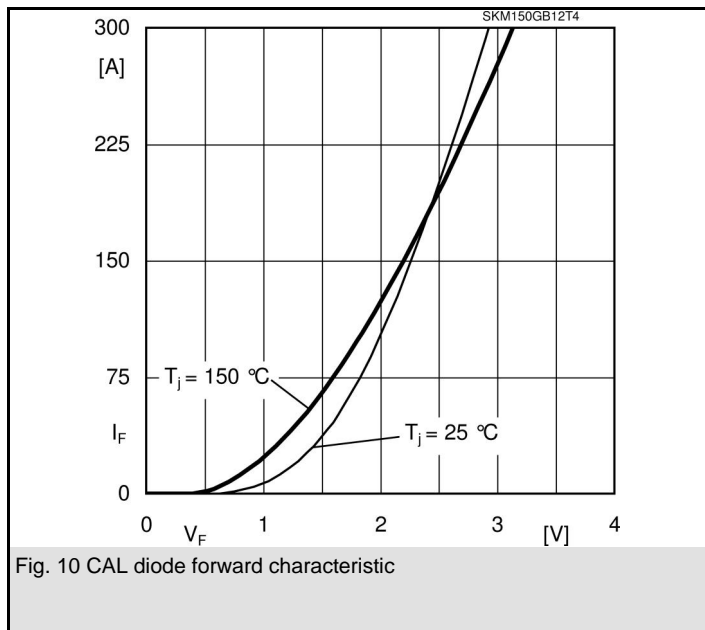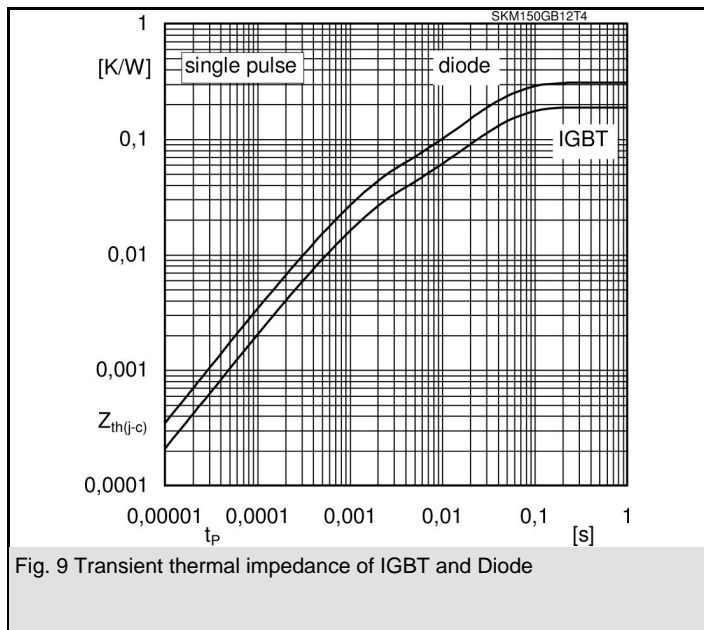


SKM 150GB12T4

UL recognized file

CASED61

no. E 63 532

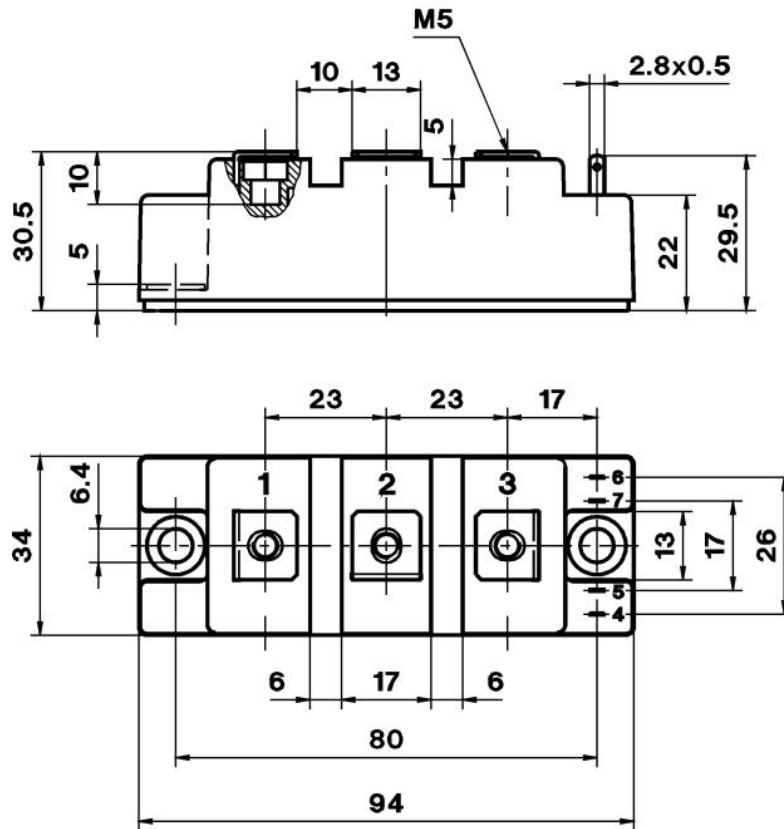

Case D61



GB

Case D61