

**atrin** **electronic**

Expertise, variety and quality



www.atrinelec.com

**آترین الکترونیک**

تخصص، تنوع و کیفیت

02166766957 - 02166766927



info@atrinelec.com



تهران پاساژ امجد طبقه 1 واحد 16




@atrinelec



# SS12 THRU SS16

**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**  
*Reverse Voltage - 20 to 60 Volts      Forward Current - 1.0 Ampere*

## DO-214AC

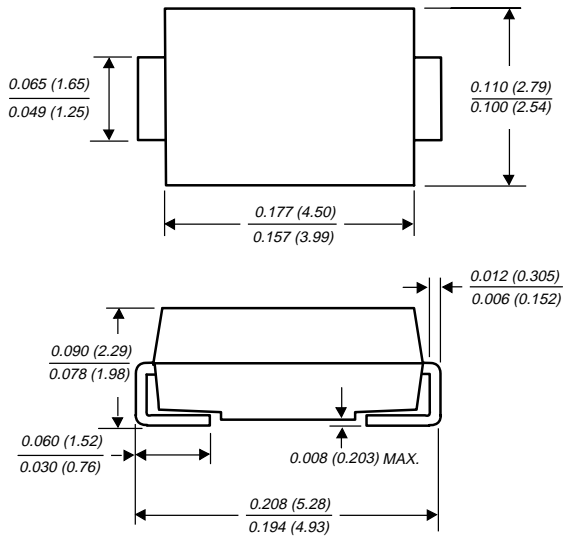

Dimensions in inches and (millimeters)

## FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability classification 94V-0
- ◆ For surface mount applications
- ◆ Low profile package
- ◆ Built-in strain relief
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 250°C/10 seconds on terminals



## MECHANICAL DATA

**Case:** JEDEC DO-214AC molded plastic body  
**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Weight:** 0.002 ounce 0.064 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SS12	SS13	SS14	SS15	SS16	UNITS
Device marking code		S2	S3	S4	S5	S6	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	Volts
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	Volts
Maximum average forward rectified current at T <sub>L</sub> (SEE FIG. 1)	I <sub>(AV)</sub>	1.0					Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	40.0					Amps
Maximum instantaneous forward voltage at 1.0A (NOTE 1)	V <sub>F</sub>	0.50			0.75		Volts
Maximum DC reverse current (NOTE 1) at rated DC blocking voltage	I <sub>R</sub>	6.0		5.0			mA
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub> R <sub>θJL</sub>	88.0 28.0					°C/W
Operating junction temperature range	T <sub>J</sub>	-65 to +125			-65 to +150		°C
Storage temperature range	T <sub>STG</sub>	-65 to +150					°C

### NOTES:

(1) Pulse test: 300μs pulse width, 1% duty cycle

(2) P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SS12 THRU SS16

FIG. 1 - FORWARD CURRENT DERATING CURVE

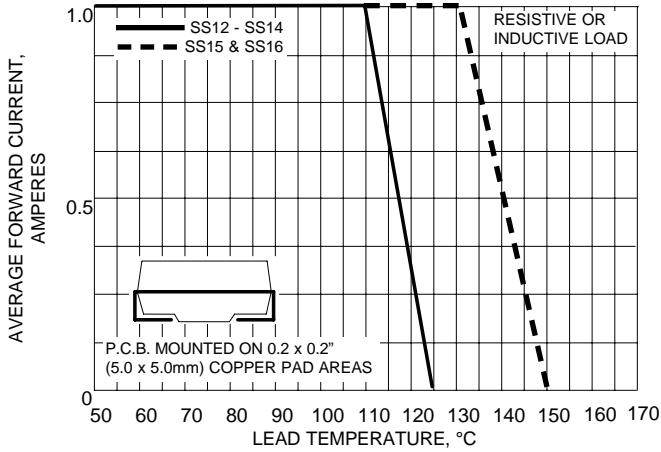


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

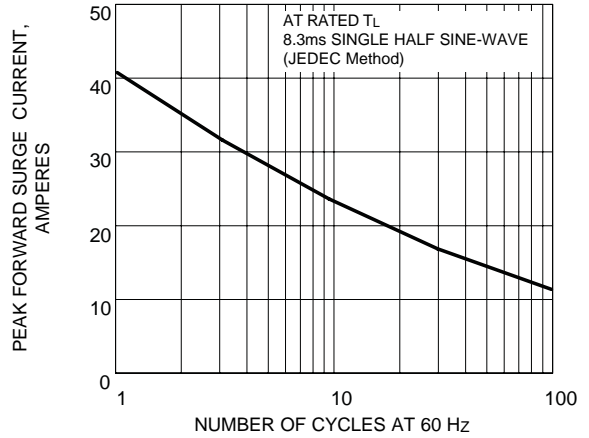


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

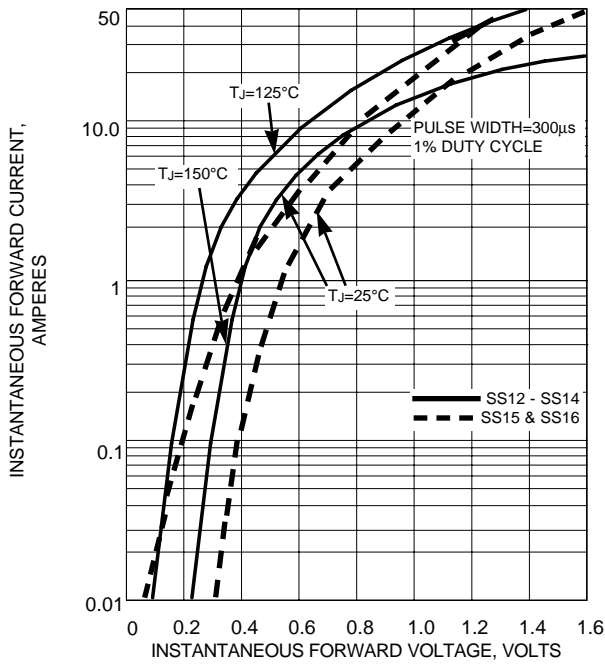


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

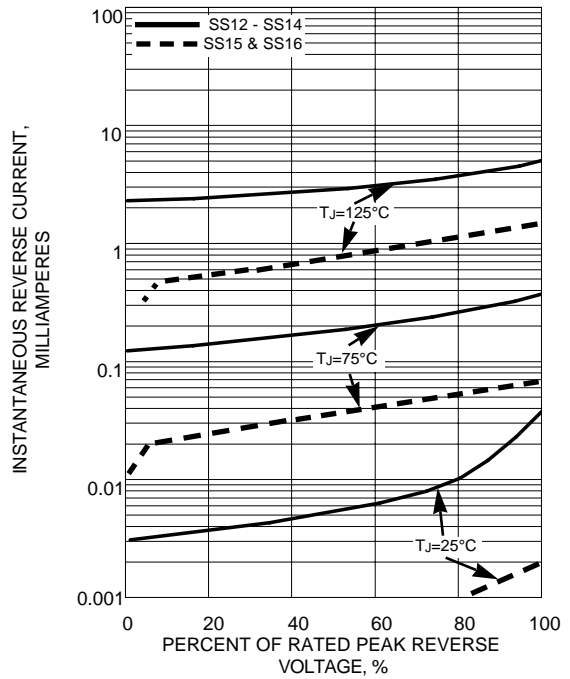


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

